


## 1.Application Scope


- 1-1. The impedance control ffc cable is used to connect in between board to board.
- 1-2. Single Ended transmission 55 Ohm± 10%,Frequency characteristic 400MHz.
- 1-3. Differential transmission (LVDS) 100 Ohm± 10%,Frequency characteristic 400MHz.

## 2.Product Type


Non ground type

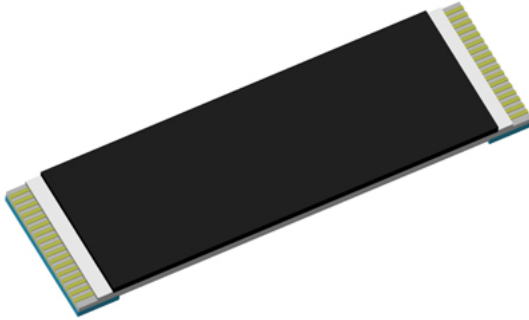

With ground type

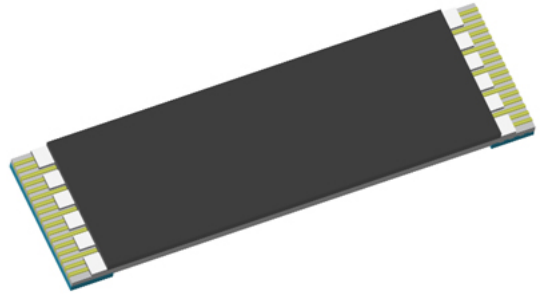

## 3.TDR measurement (Single Ended)

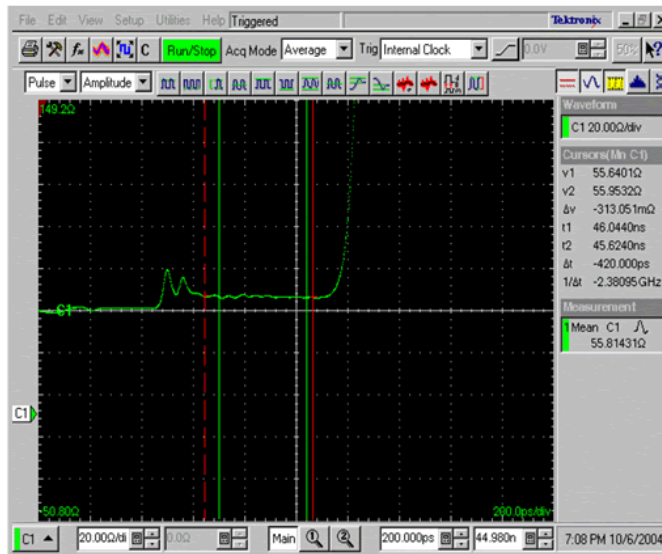

## 4.Eye Pattern

